

26 m³ annular chamber

WALK-IN CHAMBER > 3m³, G-TYPE RIGID STRUCTURE



Climatic chamber of large capacity (26 m³) made up of 4 rings.

2 rings can be taken off, which enables to reduce the useful volume to 10 m³ and then speed up the temperature rate.

The easy dismantling enables the chamber to be moved without an enormous logistic.



www.climats-tec.com

Climats - Technopole Bordeaux Montesquieu - 2/4 allée Jacques Latrille

CS 50067 - 33650 Martillac - FRANCE

Tél. +33 (0)5 56 20 25 25

e-mail: sales@climats-tec.com

Technical features :

Dimensions (mm)	Width	Depth	Height
Useful	3020	4070	2100
Overall	3380	5340	2680

Temperature range

from +150°C to -60°C

Speed variation

1°C/min average within the range

Hygrometry

from 10% to 98% humidity within the temperature range from +20°C to +90°C, limited by a dewpoint of 8°C

Ventilation


ventilation rate variator to reach 0,5m/s inside the test volume

Homegeneity and Regulation :

Temperature homogeneity (carried out with PT100 probes set at 25 cm from the walls) below 1°C

Temperature regulation below 1°C after stabilization

Humidity regulation in the region of 2% after stabilization

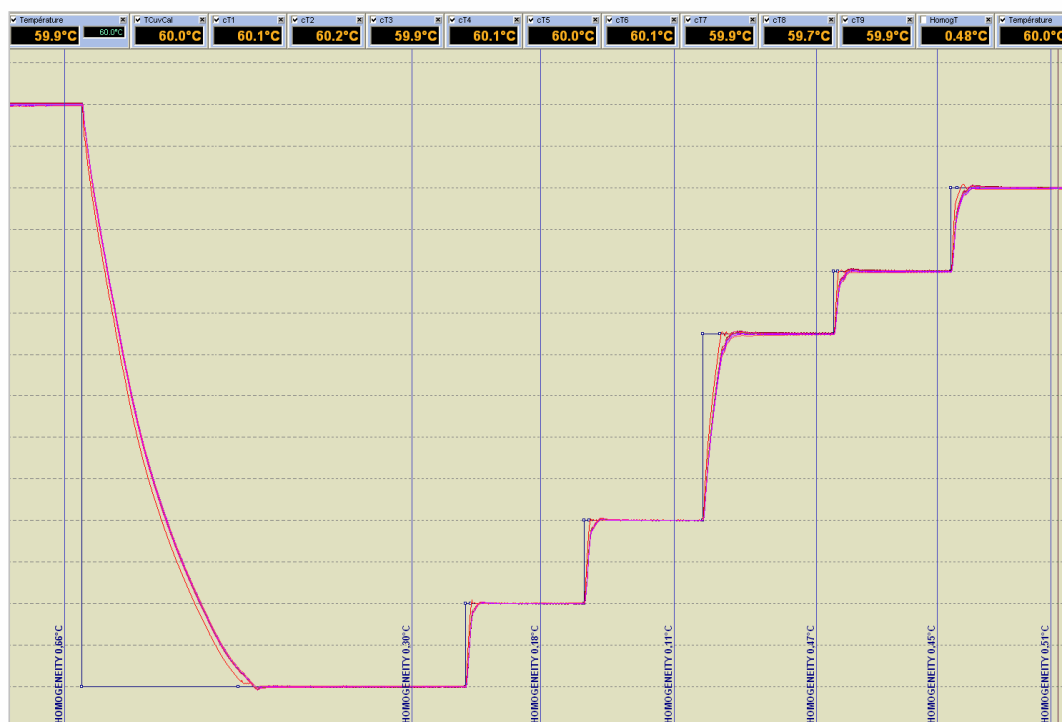

www.climats-tec.com

Climats - Technopole Bordeaux Montesquieu - 2/4 allée Jacques Latrille

CS 50067 - 33650 Martillac - FRANCE

Tél. +33 (0)5 56 20 25 25

e-mail: sales@climats-tec.com